



Product Guide

**Professional.
Reliable.
Secure.**

dropsafe.com

About Us



Dropsafe: Your global Drops Prevention Partner

Dropsafe creates solutions to prevent objects falling from height, and we are your global partner in drops prevention. We offer the tools, advice and resources you need to tackle drops risks comprehensively, sustainably, and in a cost-effective manner.

Ensuring personnel safety is paramount. By creating a safer workplace you can not only protect your people but comply with industry best practice. As leaders in drops prevention, Dropsafe strives to help companies achieve an unparalleled level of safety. We can support you by providing the highest-quality drops prevention solutions, enabling you to set a new benchmark of industry safety.

All Dropsafe systems have been designed to be assets rather than consumables. With a focus on low-cost, long term ownership, we manufacture high-quality products to help eliminate the dangers personnel are exposed to from falling objects.

We aim to educate companies around the risks dropped objects pose through handbooks, articles and industry updates, to promote a safety culture that goes beyond our technologies. We want facility personnel to be aware of the threat dropped objects pose, ensuring teams know the dangers, and also positive and effective mitigation strategies.

Our Products

Designed and manufactured in-house, Dropsafe products have become the industry standard for Drops Prevention Solutions globally, serving multiple sectors including Oil & Gas, Power Generation, Mining, Marine and Renewables. We focus on innovation, quality, industry collaboration and third party testing and validation in order to deliver product performance that exceeds customer expectations. We maintain a leading industry-wide quality record, supported by rigorous testing procedures and state-of-the-art manufacturing control and monitoring technology.



Barrier



Nets



Slings




Pouches



Tethering



Matting

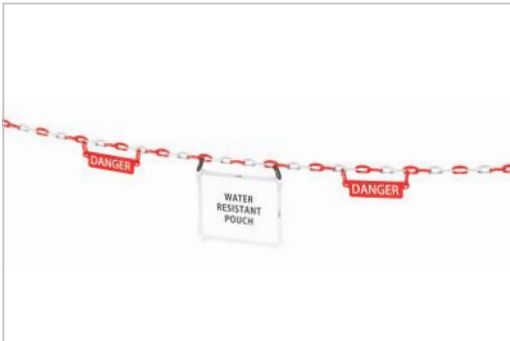

Barricade

Contents

Our Products3

Dropsafe Barrier5

 Ordering and Installation Process 6

 Enquiry Form 7

Dropsafe Nets.....8

 Ordering and Installation Process 9

 Request For Quotation Form 10

 Nets For Floodlights 11

 Fluorescent/LED Strip Lights 16

 Speakers/Horns 18

 Navigation/Strobe Lights 19

 CCTV Cameras 20

 Self-Retracting Lifelines 21

 Pipe Clamps. 22

 Anode, Junction Boxes, Heat, Smoke & CO₂ Detectors. 23

 Crane Boom Stoppers, Crown Block Stoppers & Bend Restrictors 24

Dropsafe Slings25

Dropsafe Pouches28

Dropsafe Tethering29

Dropsafe Matting.....32

Dropsafe Barricade33

General RFQ Form35

DISCLAIMER

ALL STATEMENTS AND INFORMATION MADE IN THIS BROCHURE ARE FOR INFORMATION PURPOSES ONLY. DROPSAFE MAKES NO REPRESENTATIONS OR WARRANTIES OF ANY KIND (EXPRESS OR IMPLIED) ABOUT THE COMPLETENESS OF THE INFORMATION OR THE SUITABILITY OF THE PRODUCT FOR SPECIFIC NEEDS. DROPSAFE ASSUMES NO LIABILITY FOR ANY LOSSES OR DAMAGE RESULTING FROM ANY RELIANCE OR DEPENDENCE ON THE PUBLISHED INFORMATION. DISSEMINATION OF ANY INFORMATION CONTAINED IN THIS BROCHURE IS PROHIBITED. DROPSAFE RESERVES THE RIGHT TO ADD AND REMOVE OR AMEND PRODUCTS TO ITS LINE AT ANY TIME, AND THE READER SHOULD CHECK FOR UPDATES ON OUR WEBSITE.

IMPORTANT

The information contained in this Product Guide is for reference only. For further Product information visit dropsafe.com or email info@dropsafe.com. For information regarding the correct methods for installation, survey and replacement of our products, consult the detailed instructions provided with all Dropsafe Products.

Dropsafe Barrier

The Dropsafe Barrier is a dropped object prevention system, that reduces the risk of harm to people and critical equipment caused by items falling from height.

The system is affixed to the inside of guardrailing on walkways, elevated platforms or stairways and is suitable for both permanent and temporary installations. The Dropsafe Barrier prevents loose dynamic items from becoming dropped objects.

The system can also be used as a physical barrier between personnel and operating machinery to significantly improve workplace safety.



Installation Locations




Walkways & Stairways



Scaffolding



Storage Areas



Machine Guards



Conveyor Walkways



Storage Tanks

Guardrailing configurations can vary throughout a facility. Guardrailing can have different post & rail sizes, heights & spacings and if fitted, toe board variations. These variations must be properly captured using our enquiry or order forms, so that you can receive an accurate quotation and the correct components for installation.

Quotations

Barrier quotations are provided per meter for either a standard installation or a non-standard installation type. We can determine your installation type and provide a quote after you complete and send us the Barrier ‘Enquiry Form.’

⚠ WARNING

Install the Dropsafe Barrier only if:

- 1. Guardrailing is industry compliant and in good serviceable condition;
- 2. Areas are not exposed to hazardous chemicals; and
- 3. The installation instructions are strictly followed.

Features



High impact resistance
(62.5 J)



Designed for high winds
250 kmph - 155 mph (Cat 5 hurricane)



Small mesh aperture
(19.8 mm / 0.78 Inch)



Suitable for harsh environments
(5 year weather testing)



5-year warranty



ABS approved for
DOPP+ standard

Dropsafe Barrier - Ordering and Installation Process

You can order and install the Dropsafe Barrier yourself, or engage a Dropsafe approved third party contractor.

Order

1

Complete the ‘**Enquiry Form**’ (photocopy from Product Guide or download from [dropsafe.com](#)) and return to barrier@dropsafe.com. We will provide a quote based on the completed form.



2

If additional information regarding your installation is required, we will send an ‘**Information Collection Form**’ (ICF), for you to complete and return. It is possible that your quote may need to be adjusted according to the new information.*



3

You confirm the order for the required Dropsafe Barrier installation areas.

Product Delivery

4

Your order is packed and labelled for each of your chosen installation areas

Installation

5

Installation instructions are provided with the order. If you opt for self-installation, we provide online training specific to your facility.**

* Dropsafe can put you in contact with a third party contractor to comple the ICF on your behalf if required.
** If you do not opt for self-installation, please contact us and we will introduce a certified third party contractor in your area.

Instructions for completing the Enquiry Form

1.

Input your contact details, company and facility information
2.

Input the area number, name and location details (e.g. under stairways)
3.

Input post, rail and toe board dimensions (e.g. post width/diameter; rail diameter and profile; toe board height, depth and position)
4.

Input the distance between each adjacent post (or if not practical, total length of guardrailing and the total number of posts including end posts)
5.

Take a clear perspective photo of the guardrailing (input the photo file or file name and attach the photo to the email)
6.

Leave any additional comments or questions regarding the area on the Enquiry Form

Contact barrier@dropsafe.com for any enquiries

Example

Area #	Area Name	Guardrail Dimensions	☒ mm	☐ inches	Post Spacing		Photos
1	Staging Area	Post	Ø38		A	400	
		Rails	Ø19 9mm offset		B	1530	
					C	400	
					D		
		Toe Board & Orientation	120 x 8 Mid mounted		E		
					F		

Dropsafe Barrier - Enquiry Form

We must receive an accurate and complete ‘Enquiry Form’ to provide a quotation.



Date:

DD

MM

YYYY

 /

DD

MM

YYYY

 /

DD

MM

YYYY

 Company: _____

Contact Person: _____

Facility: _____

Position: _____

State / Province / Area: _____

Email: _____

Country: _____

Phone: _____

Area #	Area Name	Guardrail Dimensions		inches		Post Spacing	Photos	Comments
		mm						
		Post				A		
						B		
						C		
		Rails				D		
						E		
						F		
		Toe Board & Orientation				G		
						H		
						I		
		Post				A		
						B		
						C		
		Rails				D		
						E		
						F		
		Toe Board & Orientation				G		
						H		
						I		
		Post				A		
						B		
						C		
		Rails				D		
						E		
						F		
		Toe Board & Orientation				G		
						H		
						I		
		Post				A		
						B		
						C		
		Rails				D		
						E		
						F		
		Toe Board & Orientation				G		
						H		
						I		

Dropsafe Nets

The Dropsafe Nets are dropped object prevention devices that reduce the risk of harm to people and critical equipment caused by items falling from height.

Our Nets have always been a widely adopted and trusted safety solution, securely enclosing & tethering overhead fixtures to prevent dropped & falling objects. The updated Nets are an enhancement of the initial range, with additional features. With the triple action auto locking Trisafe™ carabiner significantly reducing human error, and RFID enabled Choke Plate, Dropsafe products provide a new & unparalleled level of workplace safety.



Fixture Types



Quotations

Fixtures installed at height vary in shape, size, weight and mounting configuration. To select the correct part number from this product guide, or to make a new product enquiry, you must provide accurate information about your fixture(s). In order for us to provide an accurate quotation, you must follow the Ordering Process .

WARNING

The attachment structure must be strong enough to support the fixture if it drops.
Install the Dropsafe Net only if:

1. The distance between the fixture and the attachment point is:

- vertically less than 30 cm (12")
- horizontally less than 50 cm (20")

2. The Net fit snugly around the fixture, and is not loose

Features

Triple action, auto locking Trisafe™ Carabiner - 316L

In-built RFID chip for improved traceability

Toggles ensure a snug fit for all fixture shapes

Designed and tested to over 5 times Safe Working Load (SWL)

Withstands extreme temperatures between -40°C to 500°C

SUS/AISI 316 stainless steel wire

Available for a wide range of fixtures (custom designs also available)

3-year warranty

ABS approved for DOPPP+ standard

Dropsafe Nets - Ordering and Installation Process

You can order and install the Dropsafe Nets yourself or engage a Dropsafe-approved third party contractor.

1

Email us the facility address at net@dropsafe.com and we will introduce the closest third party contractors in your area

2

Third party contractor surveys your facility and sends report to you and us

4

We email you the 'Quotation.' You then place an order for your selected Dropsafe Nets.

1

Collect the following for each fixture type you intend to secure:

- Fixture weight (including mounting bracket)
- Fixture dimensions (length, width & height)
- Mounting configuration:

Side-mounted
Bracket along side of fixture

Rear-mounted
Bracket facing rear of fixture

- Perspective photo
- Fixture manufacturer & model (optional)

2

Reference Product Guide to match Net Part No. to your fixture type(s). To match a fixture to a Net Part No. from the Product Guide ensure that:

- Fixture weight incl. mounting bracket does not exceed the stated SWL
- One dimension size does not exceed the reference fixture by >15%
- Two dimension sizes do not exceed the reference fixture by >10%
- The mounting configuration matches the Product Guide reference

3

Match

You complete the 'Request For Quotation Form' (photocopy from Product Guide or download from [dropsafe.com](https://www.dropsafe.com)) and email us at net@dropsafe.com

3

No Match

You complete the 'New Product Enquiry Form' (photocopy from Product Guide or download from [dropsafe.com](https://www.dropsafe.com)) and email us at net@dropsafe.com

5

Your order is packed and labeled for each installation area.

Product Delivery

6

Email us and we will introduce the closest third party installation contractors in your area.

6

We provide online training for your installation type. Installation instructions will also be provided with the product.

8 Dropsafe Nets

Dropsafe Nets 9

Dropsafe Nets - Request For Quotation Form



Date: / / Company: Facility:
State / Province / Area: Country:
Contact Person: Position:
Email: Phone:

Complete this part if you know the required Net Part No. from the Product Guide.

Instructions:

- Select the Part No. from the Product Guide
- Enter Fixture Location on the facility
- Select the Mounting: Side or Rear-mounted and confirm mounting is no more than 30cm/50cm
- Enter Quantity
- Enter Fixture Manufacturer
- Enter Fixture Model
- Take a clear perspective photo of the fixture

Enter the photo file name in the table and attach the photo to the email

Side-mounted
Bracket along side of fixture

Rear-mounted
Bracket facing rear of fixture

Perspective photo example

1	Part No.	2	Fixture Location	3	Mounting	4	Quantity	5	Fixture Manufacturer	6	Fixture Model	7	Photo File Name
	8500070		Hose storage area		☐ Rear ☒ Side		20		Philips floodlight		LED 200W		IMG_195.JPG
					☐ Rear ☐ Side								
					☐ Rear ☐ Side								
					☐ Rear ☐ Side								

Installation options: ☐ Third party ☐ Self Preferred location:

Complete this part if you don't know the required Net Part No. from the Product Guide.

Instructions:

- Insert Fixture Type: A= Floodlight B= Fluorescent Light C= Nav/Strobe Light D= Speaker/Horn E= CCTV Camera F= Junction Box or Sensor Unit G= Self-Retracting Lifeline (SRL) H=Other
- Select the Mounting: Side or Rear-mountedand and confirm mounting is no more than 30cm/50cm.
- Enter Quantity.
- Select the measurement unit cm or inch. Enter Dimensions of the fixture. Select the measurement unit kg or lbs.
- Enter Fixture Weight including the mounting bracket.
- Enter Fixture Location on the facility.
- Enter Fixture Manufacturer.
- Enter Fixture Model.
- Take a clear perspective photo of the fixture.

Enter the photo file name in the table and attach the photo to the email.

Side-mounted
Bracket along side of fixture

Rear-mounted
Bracket facing rear of fixture

Perspective photo example

1	2	3	4			5	6	7	8	9
Fixture Type	Mounting	Quantity	Dimensions ☐ cm ☐ inch			Fixture Weight ☐ kg ☐ lbs	Fixture Location	Fixture Mfr.	Fixture Model	Photo File Name
			Side A (Longest)	Side B	Side C (Shortest)					
A	☐ Rear ☒ Side	20	160	360	260	4	Hose storage area	Philips flood light	LED 200W	IMG_195.JPG
	☐ Rear ☐ Side									
	☐ Rear ☐ Side									
	☐ Rear ☐ Side									

Installation options: ☐ Third party ☐ Self Preferred location:

Please contact us at net@dropsafe.com for any questions.

Nets For Floodlights

Part No.: 8500070

Fixture Weight
SWL: 18.5 kg (41 lbs)

Fixture Dimensions
A = 300 mm (11.8")
B = 300 mm (11.8")
C = 300 mm (11.8")

Mounting configuration
Side-mounted

Net fits this way

Part No.: 8500070

Fixture Weight
SWL: 18.5 kg (41 lbs)

Fixture Dimensions
A = 255 mm (10")
B = 205 mm (8")

Mounting configuration
Side-mounted

Net fits this way

Part No.: 8500085

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 610 mm (24")
B = 330 mm (13")
C = 330 mm (13")

Mounting configuration
Rear-mounted

Net fits this way

Part No.: 8500085

Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 490 mm (19.3")
B = 310 mm (12.2")
C = 300 mm (11.8")

Mounting configuration
Rear-mounted

Net fits this way

Part No.: 8500090

Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 410 mm (16")
B = 410 mm (16")
C = 200 mm (8")

Mounting configuration
Side-mounted

Net fits this way

Part No.: 8500091

Fixture Weight
SWL: 35 kg (77 lbs)

Fixture Dimensions
A = 740 mm (29")
B = 590 mm (23")
C = 280 mm (11")

Mounting configuration
Side-mounted

Net fits this way

Part No.: 8500091

Fixture Weight
SWL: 35 kg (77 lbs)

Fixture Dimensions
A = 760 mm (30")
B = 535 mm (21")
C = 330 mm (13")

Mounting configuration
Side-mounted

Net fits this way

Part No.: 8500095

Fixture Weight
SWL: 28 kg (61 lbs)

Fixture Dimensions
A = 820 mm (32.3")
B = 410 mm (16")
C = 194 mm (7.6")

Mounting configuration
Side-mounted

Net fits this way

Part No.: 8500100

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 460 mm (18")
B = 375 mm (15")
C = 280 mm (11")

Mounting configuration
Rear-mounted

Net fits this way

Part No.: 8500100

Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 460 mm (18")
B = 460 mm (18")
C = 265 mm (10.5")

Mounting configuration
Rear-mounted

Net fits this way

Nets For Floodlights

Part No.: 8500100




Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 365 mm (14.3")
B = 305 mm (12")
C = 265 mm (10.5")

Mounting configuration
Rear-mounted

Net fits this way



Part No.: 8500105




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 480 mm (18.9")
B = 490 mm (19.3")
C = 170 mm (6.7")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500105




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 550 mm (21.7")
B = 550 mm (21.7")
C = 130 mm (5.1")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500106




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 535 mm (21")
B = 460 mm (18")
C = 165 mm (6.5")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500106




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 570 mm (22.4")
B = 490 mm (19.3")
C = 235 mm (9.3")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500106




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 530 mm (21")
B = 385 mm (15")
C = 280 mm (11")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500106




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 610 mm (24")
B = 500 mm (19.7")
C = 230 mm (9")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500106




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 455 mm (18")
B = 405 mm (16")
C = 280 mm (11")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500106




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 530 mm (21")
B = 430 mm (17")
C = 175 mm (7")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500107




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 600 mm (23.6")
B = 420 mm (16.5")
C = 160 mm (6.3")

Mounting configuration
Side-mounted

Net fits this way



Nets For Floodlights

Part No.: 8500110




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 460 mm (18")
B = 430 mm (17")
C = 265 mm (10.5")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500110




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 450 mm (17.7")
B = 400 mm (15.7")
C = 265 mm (10.5")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500120




Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 300 mm (11.8")
B = 300 mm (11.8")
C = 120 mm (4.7")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500120




Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 310 mm (12.2")
B = 360 mm (14.2")
C = 80 mm (3.2")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500121




Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 290 mm (11.4")
B = 450 mm (17.7")
C = 135 mm (5.3")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500121




Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 375 mm (14.8")
B = 450 mm (17.7")
C = 80 mm (3.2")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500122




Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 220 mm (8.6")
B = 180 mm (7.0")
C = 115 mm (4.5")

Mounting configuration
Side-mounted

Net fits this way



Part No.: 8500150




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 615 mm (24")
B = 490 mm (19.5")
C = 340 mm (13.5")

Mounting configuration
Rear-mounted

Net fits this way



Part No.: 8500150




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 600 mm (23.6")
B = 400 mm (15.7")
C = 400 mm (15.7")

Mounting configuration
Rear-mounted

Net fits this way



Part No.: 8500150




Fixture Weight
SWL: 25 kg (55 lbs)

Fixture Dimensions
A = 600 mm (23.6")
B = 440 mm (17.3")
C = 235 mm (9.3")

Mounting configuration
Rear-mounted

Net fits this way



Nets For Floodlights

Part No.: 8500152



Fixture Weight

SWL: 35 kg (77 lbs)


Fixture Dimensions

A = 600 mm (23.6")
B = 600 mm (23.6")
C = 340 mm (13.3")

Mounting configuration

Side-mounted

Net fits this way



Part No.: 8500155



Fixture Weight

SWL: 30 kg (66 lbs)


Fixture Dimensions

A = 570 mm (22.4")
B = 420 mm (16.5")
C = 450 mm (17.7")

Mounting configuration

Side-mounted

Net fits this way



Part No.: 8500180



Fixture Weight

SWL: 48 kg (106 lbs)


Fixture Dimensions

A = 620 mm (24.5")
B = 490 mm (19.5")
C = 510 mm (20")

Mounting configuration

Side-mounted

Net fits this way



Part No.: 8500185



Fixture Weight

SWL: 48 kg (106 lbs)


Fixture Dimensions

A = 690 mm (27")
B = 690 mm (27")
C = 310 mm (12")

Mounting configuration

Side-mounted

Net fits this way



Part No.: 8500185



Fixture Weight

SWL: 48 kg (106 lbs)


Fixture Dimensions

A = 610 mm (24")
B = 530 mm (21")

Mounting configuration

Side-mounted

Net fits this way



Part No.: 8500190



Fixture Weight

SWL: 15 kg (33 lbs)


Fixture Dimensions

A = 400 mm (15.7")
B = 200 mm (8")
C = 150 mm (6")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500312



Fixture Weight

SWL: 15 kg (33 lbs)


Fixture Dimensions

A = 275 mm (10.8")
B = 160 mm (6.3")
C = 120 mm (4.7")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500320



Fixture Weight

SWL: 20 kg (44 lbs)


Fixture Dimensions

A = 560 mm (22")
B = 215 mm (8.5")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500325



Fixture Weight

SWL: 25 kg (55 lbs)


Fixture Dimensions

A = 635 mm (25")
B = 280 mm (11")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500325



Fixture Weight

SWL: 25 kg (55 lbs)


Fixture Dimensions

A = 480 mm (18.9")
B = 365 mm (14.4")

Mounting configuration

Rear-mounted

Net fits this way



Nets For Floodlights

Part No.: 8500327



Fixture Weight

SWL: 25 kg (55 lbs)


Fixture Dimensions

A = 580 mm (22.8")
B = 510 mm (20")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500327



Fixture Weight

SWL: 25 kg (55 lbs)


Fixture Dimensions

A = 610 mm (24")
B = 300 mm (11.8")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500327



Fixture Weight

SWL: 25 kg (55 lbs)


Fixture Dimensions

A = 460 mm (18")
B = 430 mm (17")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500327



Fixture Weight

SWL: 25 kg (55 lbs)


Fixture Dimensions

A = 580 mm (22.8")
B = 475 mm (18.7")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500328



Fixture Weight

SWL: 30 kg (66 lbs)


Fixture Dimensions

A = 250 mm (9.8")
B = 420 mm (16.5")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500330



Fixture Weight

SWL: 27 kg (59.5 lbs)


Fixture Dimensions

A = 700 mm (27.6")
B = 420 mm (16.5")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500331



Fixture Weight

SWL: 8 kg (17.6 lbs)


Fixture Dimensions

A = 355 mm (14")
B = 275 mm (10.8")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500334



Fixture Weight

SWL: 25 kg (55 lbs)


Fixture Dimensions

A = 480 mm (18.9")
B = 490 mm (19.3")
C = 170 mm (6.7")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500334



Fixture Weight

SWL: 25 kg (55 lbs)


Fixture Dimensions

A = 150 mm (6")
B = 575 mm (22.6")

Mounting configuration

Rear-mounted

Net fits this way



Part No.: 8500335



Fixture Weight

SWL: 20 kg (44 lbs)


Fixture Dimensions

A = 83 mm (3.3")
B = 406 mm (15.9")

Mounting configuration

Side-mounted
Rear-mounted

Net fits this way



Nets For Floodlights


Part No.: 8500336



Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 270 mm (10.6")
B = 270 mm (10.6")
C = 180 mm (7")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500337



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 150 mm (6")
B = 500 mm (19.7")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500338



Fixture Weight
SWL: 26 kg (57 lbs)

Fixture Dimensions
A = 350 mm (13.8")
B = 310 mm (12.2")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500725



Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 230 mm (9")
B = 180 mm (7")

Mounting configuration
Rear-mounted



Net fits this way

Nets For Fluorescent/LED Strip Lights


Part No.: 8500610



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1840 mm (72.5")
B = 110 mm (4.3")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500620



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 740 mm (29")
B = 210 mm (8.3")
C = 150 mm (6")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500625



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 750 mm (29.4")
B = 170 mm (6.8")
C = 95 mm (4")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500627



Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 1059 mm (41.7")
B = 54 mm (2.1")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500626



Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 445 mm (17.5")
B = 54 mm (2.1")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500628



Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 1380 mm (54.3")
B = 54 mm (2.1")

Mounting configuration
Rear-mounted



Net fits this way

Nets For Fluorescent/LED Strip Lights


Part No.: 8500630



Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 900 mm (35.5")
B = 190 mm (7.5")
C = 130 mm (5.1")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500635



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 900 mm (35.5")
B = 170 mm (6.8")
C = 95 mm (4")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500640



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1320 mm (52")
B = 190 mm (7.5")
C = 140 mm (5.5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500640



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1360 - 1500 mm (53.5-59")
B = 190 mm (7.5")
C = 130 mm (5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500640



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1350 mm (53")
B = 210 mm (8.5")
C = 150 mm (6")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500640



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 1385 mm (54.5")
B = 165 mm (6.5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500645



Fixture Weight
SWL: 24 kg (53 lbs)

Fixture Dimensions
A = 1350 mm (53")
B = 170 mm (6.8")
C = 95 mm (4")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500650



Fixture Weight
SWL: 32 kg (71 lbs)

Fixture Dimensions
A = 1350 - 1500 mm (53 - 59")
B = 230 mm (9")
C = 160 mm (6.5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500650



Fixture Weight
SWL: 32 kg (71 lbs)

Fixture Dimensions
A = 1610 mm (63.5")
B = 170 mm (6.8")
C = 105 mm (4")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500655



Fixture Weight
SWL: 24 kg (53 lbs)

Fixture Dimensions
A = 1500 mm (59")
B = 170 mm (6.8")
C = 95 mm (4")

Mounting configuration
Rear-mounted



Net fits this way

Nets For Fluorescent/LED Strip Lights


Part No.: 8500670



Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 1350 mm (53")
B = 160 mm (6.3")
C = 130 mm (5.1")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500670



Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 1350 mm (53")
B = 300 mm (12")
C = 180 mm (7")

Mounting configuration
Rear-mounted



Net fits this way

Nets For Speakers/Horns


Part No.: 8500070



Fixture Weight
SWL: 18.5 kg (41 lbs)

Fixture Dimensions
A = 340 mm (13.4")
B = 250 mm (9.8")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500320



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 420 mm (16.5")
B = 340 mm (13.4")
C = 200 mm (8")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500750



Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 255 mm (10")
B = 205 mm (8")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500815



Fixture Weight
SWL: 6 kg (13 lbs)

Fixture Dimensions
A = 215 mm (8.5")
B = 140 mm (5.5")
C = 140 mm (5.5")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500820



Fixture Weight
SWL: 6 kg (13 lbs)

Fixture Dimensions
A = 380 mm (15")
B = 260 mm (10.5")
C = 200 mm (8")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500860



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 590 mm (21.6")
B = 380 mm (7.4")
C = 250 mm (8.8")

Mounting configuration
Rear-mounted



Net fits this way

Nets For Speakers/Horns


Part No.: 8500930



Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 245 mm (9.6")
B = 165 mm (6.5")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500931



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 550 mm (21.7")
B = 190 mm (7.4")
C = 225 mm (8.8")

Mounting configuration
Rear-mounted



Net fits this way

Nets For Navigation/Strobe Lights


Part No.: 8500320



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 510 mm (20")
B = 215 mm (8.5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500720



Fixture Weight
SWL: 4 kg (8.8 lbs)

Fixture Dimensions
A = 220 mm (8.7")
B = 140 mm (5.5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500730



Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 240 mm (9.5")
B = 210 mm (8.3")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500750



Fixture Weight
SWL: 8 kg (17.6 lbs)

Fixture Dimensions
A = 400 mm (15.7")
B = 200 mm (8")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500760



Fixture Weight
SWL: 30 kg (66 lbs)

Fixture Dimensions
A = 495 mm (19.5")
B = 495 mm (19.5")
C = 420 mm (16.5")
D = 150 mm (6")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500780



Fixture Weight
SWL: 65 kg (143 lbs)

Fixture Dimensions
A = 980 mm (38.6")
B = 560 mm (22")
C = 560 mm (22")
D = 150 mm (6")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500793



Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 485 mm (19")
B = 360 mm (14.2")

Mounting configuration
Rear-mounted



Net fits this way

Nets For CCTV Cameras


Part No.: 8500930



Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 220 mm (8.7")
B = 220 mm (8.7")
C = 170 mm (6.7")


Mounting configuration
Side-mounted



Net fits this way

Caution: Net secures motor box only, not camera body


Part No.: 8500941



Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 300 mm (11.8")
B = 100 mm (4")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500942



Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 210 mm (8.3")
B = 180 mm (7")
C = 130 mm (5.1")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500945



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 500 mm (19.7")
B = 140 mm (5.5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500946



Fixture Weight
SWL: 19 kg (42 lbs)

Fixture Dimensions
A = 325 mm (12.7")
B = 310 mm (12.2")
C = 220 mm (8.7")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500947



Fixture Weight
SWL: 6 kg (13 lbs)

Fixture Dimensions
A = 430 mm (17")
B = 168 mm (6.6")
C = 160 mm (6.3")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500948



Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 460 mm (18.1")
B = 190 mm (7.5")
C = 130 mm (5.1")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500949



Fixture Weight
SWL: 17 kg (37.5 lbs)

Fixture Dimensions
A = 250 mm (9.8")
B = 100 mm (4.0")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500950



Fixture Weight
SWL: 5 kg (11 lbs)

Fixture Dimensions
A = 325 mm (12.8")
B = 240 mm (9.4")
C = 170 mm (6.7")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500951



Fixture Weight
SWL: 8 kg (18 lbs)

Fixture Dimensions
A = 260 mm (10.2")
B = 210 mm (8.3")
C = 140 mm (5.5")

Mounting configuration
Rear-mounted



Net fits this way

Nets For CCTV Cameras


Part No.: 8500952



Fixture Weight
SWL: 18 kg (40 lbs)

Fixture Dimensions
A = 295 mm (11.60")
B = 220 mm (8.66")
C = 165 mm (6.50")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500952



Fixture Weight
SWL: 18 kg (40 lbs)

Fixture Dimensions
A = 338 mm (13.30")
B = 220 mm (8.66")
C = 165 mm (6.50")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500954



Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 480 mm (18.9")
B = 176 mm (7")

Mounting configuration
Side-mounted



Net fits this way


Part No.: 8500955



Fixture Weight
SWL: 10 kg (22 lbs)

Fixture Dimensions
A = 280 mm (11")
B = 115 mm 4.5")
C = 90 mm (3.5")

Mounting configuration
Side-mounted



Net fits this way

Nets For Self-Retracting Lifelines


Part No.: 8500201



Fixture Weight
SWL: 40 kg (88 lbs)

Fixture Dimensions
A = 295 mm (11.6")
B = 150 mm (6")
C = 90 mm (3.5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500203



Fixture Weight
SWL: 50 kg (110 lbs)

Fixture Dimensions
A = 350 mm (13.8")
B = 200 mm (8")
C = 165 mm (6.5")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500205



Fixture Weight
SWL: 60 kg (132 lbs)

Fixture Dimensions
A = 475 mm (18.7")
B = 280 mm (11")
C = 185 mm (7.3")

Mounting configuration
Rear-mounted



Net fits this way


Part No.: 8500208



Fixture Weight
SWL: 18 kg (40 lbs)

Fixture Dimensions
A = 170 mm (6.7")
B = 100 mm (3.9")
C = 56 mm (2.2")

Mounting configuration
Rear-mounted



Net fits this way

Nets For Pipe Clamps

Part No.: 8500219



Fixture Weight


SWL: 20 kg (44 lbs)

Fixture Dimensions

A = 380 mm (15")

B = 285 mm (11")

C = 120 mm (5")



Net fits this way

Part No.: 8500220



Fixture Weight


SWL: 15 kg (33 lbs)

Fixture Dimensions

A = 280 mm (11")

B = 255 mm (10")

C = 100 mm (4")



Net fits this way

Part No.: 8500221



Fixture Weight


SWL: 10 kg (22 lbs)

Fixture Dimensions

A = 152 mm (6")

B = 130 mm (5")

C = 60 mm (2")



Net fits this way

Part No.: 8500222



Fixture Weight


SWL: 8 kg (17.6 lbs)

Fixture Dimensions

A = 115 mm (4.5")

B = 100 mm (4.3")

C = 45 mm (1.8")



Net fits this way

Part No.: 8500223



Fixture Weight


SWL: 8 kg (17.6 lbs)

Fixture Dimensions

A = 70 mm (2.8")

B = 56 mm (2.2")

C = 30 mm (1.2")



Net fits this way

Part No.: 8500224



Fixture Weight


SWL: 8 kg (17.6 lbs)

Fixture Dimensions

A = 55 mm (2.2")

B = 40 mm (1.6")

C = 30 mm (1.2")



Net fits this way

Part No.: 8500225



Fixture Weight


SWL: 8 kg (17.6 lbs)

Fixture Dimensions

A = 115 mm (4.5")

B = 97 mm (3.8")

C = 45 mm (1.8")



Net fits this way

Part No.: 8500226



Fixture Weight


SWL: 8 kg (17.6 lbs)

Fixture Dimensions

A = 206 mm (6.6")

B = 178 mm (7")

C = 80 mm (3.1")



Net fits this way

Part No.: 8500227



Fixture Weight


SWL: 8 kg (17.6 lbs)

Fixture Dimensions

A = 250 mm (9.8")

B = 210 mm (8.2")

C = 90 mm (3.5")



Net fits this way

Part No.: 8500228



Fixture Weight


SWL: 8 kg (17.6 lbs)

Fixture Dimensions

A = 206 mm (6.6")

B = 178 mm (7")

C = 160 mm (6.3")



Net fits this way

Nets For Pipe Clamps

Part No.: 8500229



Fixture Weight


SWL: 8 kg (17.6 lbs)

Fixture Dimensions

A = 250 mm (9.8")

B = 210 mm (8.2")

C = 180 mm (7.1")



Net fits this way

Nets For Junction Boxes, Heat, Smoke & CO₂ Detectors

Part No.: 8500311



Fixture Weight

SWL: 1 kg (2.2 lbs)


Fixture Dimensions

A = 120 mm (4.7")

B = 70 mm (2.8")

Mounting configuration

Rear-mounted



Net fits this way

Part No.: 8500311



Fixture Weight

SWL: 1 kg (2.2 lbs)

Fixture Dimensions


A = 130 mm (5.1")

B = 130 mm (5.1")

C = 80 mm (3.1")

Mounting configuration

Rear-mounted



Net fits this way

Part No.: 8500312



Fixture Weight

SWL: 15kg (33 lbs)

Fixture Dimensions


A = 275 mm (10.8")

B = 160 mm (6.3")

C = 120 mm (4.7")

Mounting configuration

Rear-mounted



Net fits this way

Part No.: 8500316



Fixture Weight

SWL: 5 kg (11 lbs)

Fixture Dimensions


A = 150 mm (5.9")

B = 150 mm (5.9")

C = 110 mm (4.3")

Mounting configuration

Rear-mounted



Net fits this way

Part No.: 8500317



Fixture Weight

SWL: 5 kg (11 lbs)

Fixture Dimensions


A = 150 mm (5.9")

B = 150 mm (5.9")

C = 150 mm (5.9")

Mounting configuration

Rear-mounted



Net fits this way


Nets For Anode

Part No.: 8500390



Fixture Weight
SWL: 15 kg (33 lbs)

Fixture Dimensions
A = 1525 mm (60")
B = 65 mm (2.5")
C = 65 mm (2.5")



Net fits this way

Nets For Hydraulic Brake Cover


Part No.: 8500337



Fixture Weight
SWL: 20 kg (44 lbs)

Fixture Dimensions
A = 150 mm (6")
B = 500 mm (19.7")

Mounting configuration
Rear-mounted



Net fits this way


Nets For Crane Boom Stoppers

Part No.: 8500340



Fixture Weight
SWL: 35 kg (77 lbs)

Fixture Dimensions
A = 965 mm (36")
B = 150 mm (6")



Net fits this way


Nets For Crown Block Stoppers

Part No.: 8500451



Fixture Weight
SWL: 50 kg (110 lbs)

Fixture Dimensions
A = 1370 mm (54")
B = 405 mm (16")
C = 190 mm (7.5")




Net fits this way

Nets For Bend Restrictors

Part No.: 8500420



Fixture Dimensions
A = 9145 mm (360")
B = 485 mm (19")




Net fits this way


Dropsafe Slings

The Dropsafe Safety Sling range offers a high standard of secondary securing for fixtures located at height. The Slings are made of SUS 316 stainless steel, and are specifically designed to withstand harsh offshore environments.


Tested and certified to over 5X the Safe Working Load, the Dropsafe Slings provide an effective way to increase work site safety. They boast a range of specific features, including the Trisafe™ Carabiner, double ferrules at each end, and an ID tag for increased traceability.

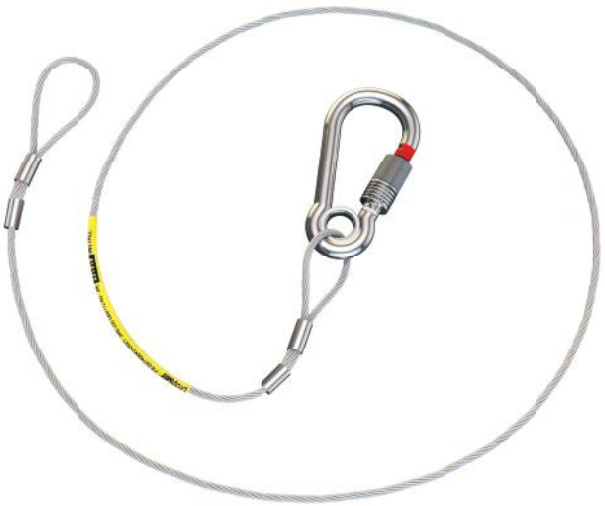


Application Types

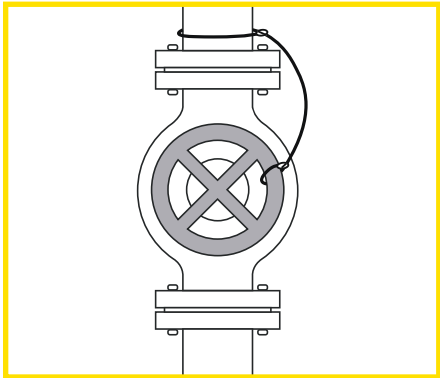

Valve Handle

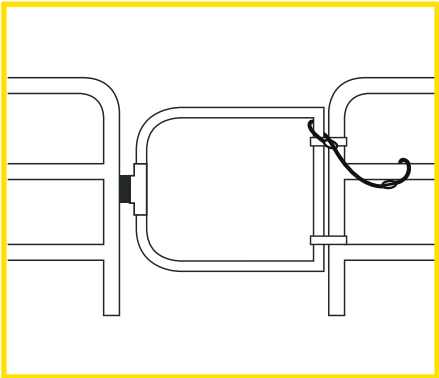

Swing Gate

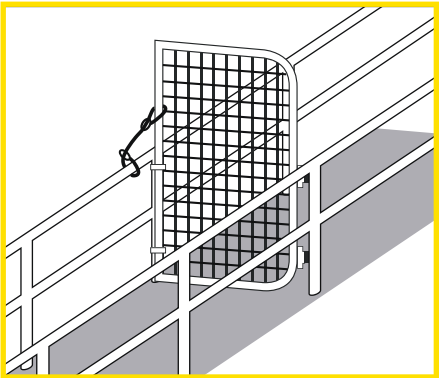

Access Gate

Features

- 

SUS/AISI 316 stainless steel wire
- 

Designed and tested to over 5x Safe Working Load
- 

Suitable for harsh environments
- 

Fire and chemical resistant
- 

Triple action auto locking Trisafe™ Carabiner - 316L
- 

Traditional Carabiner with spring-loaded gate nut available
- 

Fast & easy installation no tools required
- 

ID tag for improved traceability
- 

ABS approved for DOPP+ standard

Dropsafe Slings

Part No.: S014002141001



Lanyard & Carabiner
SWL: 1 kg (2.2 lbs)

A (Extended) = 1100 mm (43.3")
B = 70 mm (2.7")

Wire rope + Coating
Ø = 3 mm
Carabiner Ø = 7 mm




Part No.: S028005152001



Carabiner
SWL: 80 kg (176 lbs)

A = 70 mm (2.7")
B = 35 mm (1.4")

Carabiner Ø = 7 mm



Dropsafe Slings


Part No.: S014002100101



Cable & Carabiner
SWL: 10 kg (22 lbs)

A = 230 mm (9")
B = 70 mm (2.7")

Wire rope Ø = 1.5 mm
Carabiner Ø = 7 mm




Part No.: S014002153801



Cable & Carabiner
SWL: 80 kg (176 lbs)

A = 600 mm (23.6")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm




Part No.: S014002153001




Cable & Carabiner
SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm




Part No.: S014002153201




Cable & Carabiner
SWL: 80 kg (176 lbs)

A = 1500 mm (59.1")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm




Part No.: S014002153101



Cable & Carabiner
SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm




Part No.: S014002153701



Cable & Carabiner
SWL: 80 kg (176 lbs)

A = 3000 mm (118")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm




Part No.: S014002153301



Cable
SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")
B = 30 mm (1.2")

Wire rope Ø = 3 mm




Part No.: S014002153401



Cable
SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")
B = 30 mm (1.2")

Wire rope Ø = 3 mm




Part No.: S014002153901



Cable & 2 x Carabiner
SWL: 80 kg (176 lbs)

A = 600 mm (23.6")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm




Part No.: S014002153501



Cable & 2 x Carabiner
SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm



Dropsafe Slings


Part No.: S014002153601



Cable & 2 x Carabiner
SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")
B = 70 mm (2.7")

Wire rope Ø = 3 mm
Carabiner Ø = 7 mm




Part No.: S014002153802



Cable & Trisafe™
SWL: 80 kg (176 lbs)

A = 600 mm (23.6")
B = 70 mm (2.7")

Wire rope Ø = 3 mm




Part No.: S014002153002




Cable & Trisafe™
SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")
B = 70 mm (2.7")

Wire rope Ø = 3 mm




Part No.: S014002153202



Cable & Trisafe™
SWL: 80 kg (176 lbs)

A = 1500 mm (59.1")
B = 70 mm (2.7")

Wire rope Ø = 3 mm




Part No.: S014002153102



Cable & Trisafe™
SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")
B = 70 mm (2.7")

Wire rope Ø = 3 mm




Part No.: S014002153902



Cable & 2 x Trisafe™
SWL: 80 kg (176 lbs)

A = 600 mm (23.6")
B = 70 mm (2.7")

Wire rope Ø = 3 mm




Part No.: S014002153502



Cable & 2 x Trisafe™
SWL: 80 kg (176 lbs)

A = 1200 mm (47.2")
B = 70 mm (2.7")

Wire rope Ø = 3 mm




Part No.: S014002153602



Cable & 2 x Trisafe™
SWL: 80 kg (176 lbs)

A = 2000 mm (78.7")
B = 70 mm (2.7")

Wire rope Ø = 3 mm




Part No.: S014004153001



Cable & Carabiner
SWL: 113 kg (250 lbs)

A = 1200 mm (47.2")
B = 80 mm (3.1")

Wire rope Ø = 4 mm
Carabiner Ø = 8 mm




Part No.: S014002154001



Padlock
SWL: 10 kg (22 lbs)

A = 1000 mm (39.4")
B = 70 mm (2.7")
C = 53 mm (2.0")
D = 40 mm (1.6")
E = 32 mm (1.2")

Wire rope Ø = 3 mm
Padlock shackle Ø = 7 mm



Dropsafe Pouches

Dropsafe Pouches are safety securing devices designed to secure handheld items used at height (such as two-way radios, portable gas detectors, aerosol spray cans and multimeters).

The Pouch fully encloses the item being secured and tethers the item to the user, preventing it from becoming a dropped or falling objects hazard.

Quotations

Hand held items used at height vary in shape, size and weight. Ensure the items you intend to secure with the Pouch meet the specifications of the Part No. you select. To order, complete the 'General RFQ Form' at the back of this booklet and email us at products@dropsafe.com.

Features

- 

Designed and tested to over 2 times Safe Working Load (SWL)
- 

Comes with heavy duty belt clip
- 

SUS/AISI 316 stainless steel
- 

Available in a range of sizes (custom designs also available)


Dropsafe Pouches

Part No.: S012001100701



Fixture Specifications
SWL: 500 g (1.10 lbs)

A = 60 - 150 mm (2.4" - 5.9")
B (Min. circumference) = 140 mm (6.6")




Net fits this way

Part No.: S012002100001



Fixture Specifications
SWL: 750 g (1.65 lbs)

A = 150 - 250 mm (5.9" - 9.8")
B (Min. circumference) = 210 mm (8.3")



Net fits this way


Part No.: S012003100001



Large Handheld Devices

Fixture Specifications
SWL: 750 g (1.65 lbs)

A = 245 mm (9.6")
B = 125 mm (4.9")
C = 45 mm (1.7")



Net fits this way

Dropsafe Tethering

The Dropsafe Tethering solutions feature the world's first triple action, auto locking carabiner, specifically designed for securing tool (and equipment) use at height.

Our patented Trisafe™ technology is easy to use, ergonomic, and suitable for one handed glove operation, reducing the risk of human error and to prevent tools and other items from becoming dropped objects. Made from 100% stainless steel, the Trisafe™ is also easy to inspect and clean, giving it extended durability in the harshest environments.

The versatile range comes in a variety of different lengths, material types and functions depending on the type and weight of the tool, the application and/or user preference.





WARNING

Prior to connecting and using Lanyards, all tethering system product warnings and instructions should be read and understood.

1. Weigh the tool(s) to be tethered to ensure they do not exceed the Maximum Weight Capacity of the Lanyard or any part of your tethering system. Refer to the label or product marking information for Maximum Weight Capacity information.
2. The Maximum Weight Capacity for the product varies if tethered to a human (of average body weight and strength) versus a rigid fixture. Exceeding the maximum weight limit may result in injury or death. Please adhere to the maximum weight and length limits found on the product labels.
3. Multiple Lanyards should not be joined together.
4. If you are using retrofit Tool or Anchor Attachments, ensure the Maximum Tether Length identified on the attachments is compatible with the identified tether length indicated on the tool lanyard label.

Features

- 

Trisafe™ triple action, auto locking carabiner(s)
- 

360° integrated swivel avoids tangles
- 

Third-party tested & compliant with international standards
- 

Designed for one-handed operation with gloves
- 

Variety of Lanyard types and attachment combinations
- 

Designed for harsh environments

Dropsafe Tool Tethering Lanyards

Part No. S017001100102




Wire Tool Lanyard - Twin Carabiners

Max. Load (dynamic): 4.5 kg (10 lbs)

Dropsafe Trisafe™ Carabiner x 2 | Lanyard: SUS 316 stainless steel
AISI/SUS 316L stainless steel | wire cable, coated, 7x19

A = 1000 mm (39.4") | Wire rope Ø = 3 mm (0.1")
B = 122 mm (4.8")



Part No. S017001101201




Wire Tool Lanyard - Carabiner & Loop

Max. Load (dynamic): 4.5 kg (10 lbs)

Dropsafe Trisafe™ Carabiner x 1 | Lanyard: SUS 316 stainless steel
AISI/SUS 316L stainless steel | wire cable, coated, 7x19

A = 1000 mm (39.4") | Wire rope Ø = 3 mm (0.1")
B = 122 mm (4.8")
C = 65 mm (2.6")



Part No. S017001100501




Bungee Tool Lanyard - Twin Carabiners

Max. Load (dynamic): 6.8 kg (15 lbs) (ANSI / ISEA 121-2018)

Dropsafe Trisafe™ Carabiner x 2 | Lanyard: 1680D Polyester, Elastic
AISI/SUS 316L stainless steel

A = 800 mm (31.5") relaxed / 1200 mm (47.2") stretched
Width = 19 mm (0.75")
B = 122 mm (4.8")



Part No. S017001100301




Bungee Tool Lanyard - Carabiner & Cord Loop

Max. Load (dynamic): 6.8 kg (15 lbs) (ANSI / ISEA 121-2018)

Dropsafe Trisafe™ Carabiner x 1 | Lanyard: 1680D Polyester, Elastic
AISI/SUS 316L stainless steel

A = 800 mm (31.5") relaxed / 1200 mm (47.2") stretched
Width = 19 mm (0.75")
B = 122 mm (4.8")
C = 100 mm (4")



Dropsafe Tool Tethering Lanyards

Part No. S017001100401




Bungee Tool Lanyard - Carabiner & Webbing Loop

Max. Load (dynamic): 6.8 kg (15 lbs) (ANSI / ISEA 121-2018)

Dropsafe Trisafe™ Carabiner x 1 | Lanyard: 1680D Polyester, Elastic
AISI/SUS 316L stainless steel

A = 800 mm (31.5") relaxed / 1200 mm (47.2") stretched
Width = 19 mm (3/4")
B = 122 mm (4.8")
C = 200 mm (8")



Part No. S017001100801




Webbing Tool Lanyard - Twin Carabiners

Max. Load (dynamic): 6.8 kg (15 lbs) (ANSI / ISEA 121-2018)

Dropsafe Trisafe™ Carabiner x 2 | Lanyard: 1680D Polyester
AISI/SUS 316L stainless steel

A = 1200 mm (47.2") | Width = 25 mm (1")
B = 122 mm (4.8")



Part No. S017001100802




Webbing Tool Lanyard - Carabiner & Webbing Loop

Max. Load (dynamic): 6.8 kg (15 lbs) (ANSI / ISEA 121-2018)

Dropsafe Trisafe™ Carabiner x 1 | Lanyard: 1680D Polyester
AISI/SUS 316L stainless steel

A = 1200 mm (47.2") | Width = 25 mm (1")
B = 122 mm (4.8")
C = 200 mm (8")



Dropsafe Matting

The Dropsafe Matting is a PVC system for use on worksite walkways and flooring to stop objects falling through grating. Developed in partnership with Plastex, who have over 40 years’ experience manufacturing high quality, durable matting. The two layer open grid construction prevents even small items dropping from walkways or platforms above, and the diamond cut pattern offers a high-traction, anti-slip surface.

The system is laid on walking working surfaces situated at height. It is strong and hardwearing, designed for use in harsh environments both onshore and offshore. With high levels of resistance to both UV and chemical, oil and acid, the Dropsafe Matting system is the perfect addition to any industrial setting looking to elevate their safety programme.

Features

- 

Made from non-porous PVC
- 

Chemical, oil & acid resistant
- 

High UV resistance
Suitable for harsh environments
- 

Certified slip resistant
- 

Contours to uneven surfaces
- 

4-year warranty

Dropsafe Matting

Part No.: S015001130101  Dropsafe Matting - Heavy Duty (HD) Material: PVC Size: 0.91 x 12 m (3' x 40') Height: 14 mm (0.56") Weight: 10.5 kg/m2 (2.14 lb/sq.ft) Colour: Black	Part No.: S015001150101  Dropsafe Matting - Medium Duty (MD) Material: PVC Size: 0.91 x 12 m (3' x 40') Height: 15 mm (0.62") Weight: 7.6 kg/m2 (1.6 lb/sq.ft) Colour: Black
Part No.: S015001170101  Dropsafe Matting - Light Duty (LD) Material: PVC Size: 0.91 x 10 m (3' x 33') Height: 6 mm (0.25") Weight: 3.7 kg/m2 (0.76 lb/sq.ft) Colour: Black	



Dropsafe Barricade


The Dropsafe Barricade is a work site safety management system.

The Barricade is the only versatile and fully customisable system designed to install in any type of access and work area.

The Barricade systems flexibility enables good housekeeping practices, providing a safer working environment for your personel.



Installation Types

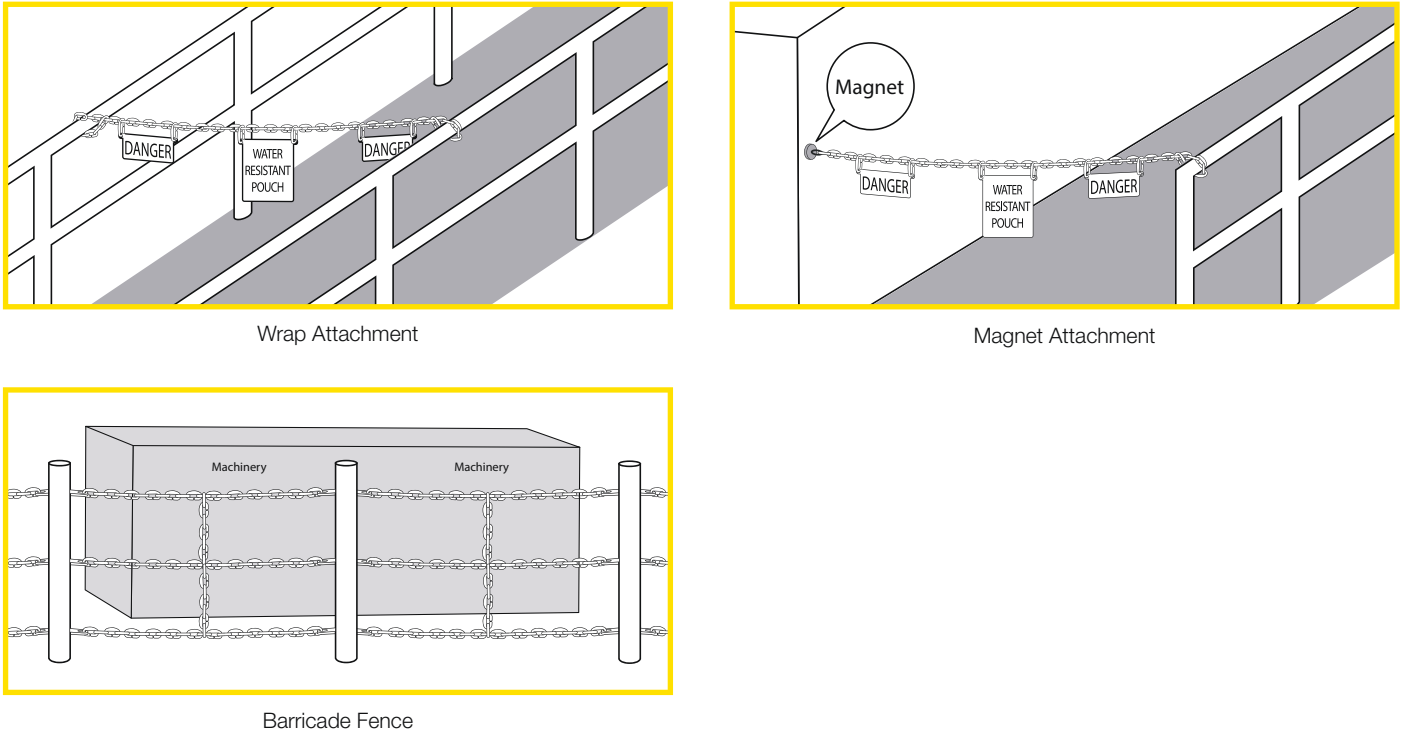

Quotations

The Barricade can be used for different applications throughout a facility. The system has multiple attaching options, customisable chain lengths, modular signage and a modular weather resistant documentation pouch. When selecting Barricade components, consider the different areas the Barricade can be used at your facility and the required attachment scenarios. To order, complete the ‘**General RFQ Form**’ at the back of this booklet and email us at products@dropsafe.com.

Features

- 

Suitable for harsh environments
- 

Durable weatherproof and reflective document pouch
- 

Customisable chain length and multiple installation options
- 

Attachable DANGER and CAUTION signs
- 

Magnetic hooks to connect the chain to metal structures

Dropsafe Barricade



Part No.: S011002100401

Chain
Colours: Yellow/Black
Units per pack:
- 20m Barricade Chain



Part No.: S011002100402

Chain
Colours: Red/White
Units per pack:
- 20m Barricade Chain



Part No.: S011002100701

Signage
Colour: Yellow
Units per pack:
- 5x CAUTION Sign



Part No.: S011002100702

Signage
Colour: Red
Units per pack:
- 5x DANGER Sign



Part No.: S011002100601

Magnet
Units per pack:
- 10x Magnet

General RFQ Form



We must receive an accurate and complete form to provide a quotation.

Date: ____ / ____ / ____ Company: _____ Facility: _____

State / Province / Area: _____ Country: _____

Contact Person: _____ Position: _____

Email: _____ Phone: _____

Instructions for completing table below

Dropsafe Safety products are designed to enable safe working practices to enhance work place safety. Please ensure you have read the requirements for each product before completing this form.

1 Enter the Part No.

2 Enter the Quantity.

[illegible]

Installation options: ☐ Third party ☐ Self

Please confirm your preferred location: _____

Please contact us at products@dropsafe.com for any questions.

Version 08/21

Protecting Your People

The Americas

☎ +1 866 299 2294
✉ america@dropsafe.com

Asia

☎ +852 3664 8350
✉ asia@dropsafe.com

Europe

☎ United Kingdom +44 0800 015 9709
☎ The Netherlands +31 0800 022 8621
✉ europe@dropsafe.com

Middle East & Africa

☎ +971 4 328 4855
✉ middleeast@dropsafe.com

Oceania

☎ +61 1800 821 649
✉ australia@dropsafe.com

Dropsafe is a proud member of:



Dropsafe®
Drops Prevention Technology