


## VT8

The compact footprint and ease of use are two main features that make the VT8 light tower one of the top models in the Generac® Tower Light range. High performance balanced with low cost allowed the VT8 to become the best-seller model in the extra-European market.

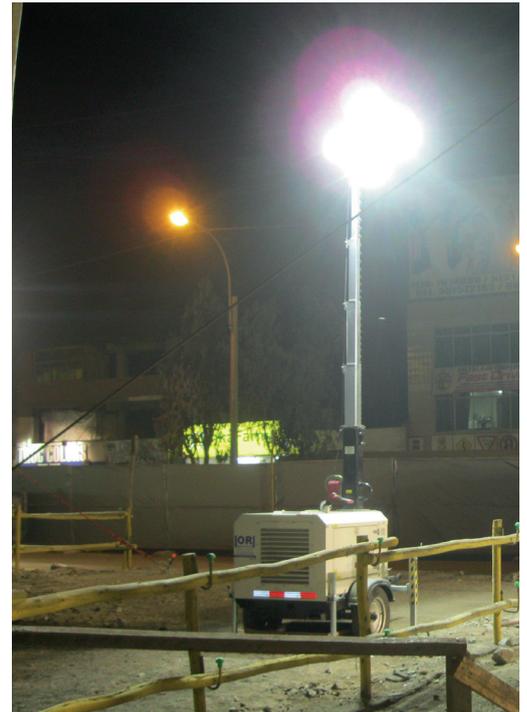

		VT8 K	VT8 Y
<b>TECHNICAL DATA</b>			
Minimum dimensions (mm)	Lenght x Width x Height	2650 x 1300 x 2460	2650 x 1300 x 2460
Maximum dimensions (mm)	Lenght x Width x Height	2650 x 2460 x 8000	2650 x 2460 x 8000
Dry weight (kg)		719	719
Lifting system	M:Manual / H:Hydraulic	M	M
Mast rotation (°)		340	340
Lamps power (W)		4 x 1000	4 x 1000
Lamps type	MH:MetalHalide / LD:LED	MH	MH
Total lumen (Lm)		360000	360000
Illuminated area (m <sup>2</sup> )		4200	4200
Engine		Kubota D1105	Yanmar 3TN
Engine cooling	W:water / A:air	W	W
Cylinders (q.ty)		3	3
Engine speed (RPM)	50 / 60 Hz	1500 / 1800	1500 / 1800
Liquid containment (110%)	√:Yes / ●:No	●	●
Alternator	kVA/V/Hz	8/220/50 - 8/240/60	8/220/50 - 8/240/60
Outlet Socket	kVA/V/Hz	3/220/50 - 3/240/60	3/220/50 - 3/240/60
Avg. sound pressure	dB(A)@7mt	68	68
Wind speed resistance (km/h)		80	80
Tank capacity (liters)		75	75
Total running time (h)		44	47

## THE BEST SELLER

The VT8 is the best seller model of light tower in the extra-european market, thanks to the vertical mast and the high quality features granted by Generac® Tower Light.

## TOP STABILITY

Five fully integrated stabilizers will ensure maximum stability in every application.

## VERTICAL MAST

A telescopic vertical mast with manual lifting system and a maximum height of 8 meters.



## METAL HALIDE LAMPS

4x1000W powerful metal halide lamps able to illuminate medium and big working areas.

## TRAILER OPTIONS

The VT8 is equipped as standard with a low speed trailer but it can be also mounted on a straight road trailer.

## ENGINE OPTIONS

You can choose the engine you prefer between Yanmar 3TN and Kubota D1105.

## OPTIONS AVAILABLE

- Low speed site-tow trailer (standard)
- Road trailer type A (straight)
- Road axle only
- 110V sockets
- Pre-heating system
- Earth picket with 5m cable
- Main/generator selector switch
- Plastic box for documents
- Dedicated colour
- Chalwyn valve
- Certified spark arrestor
- Hot-dip zinc coating of mast sections
- Ball hitch type 50 mm
- Eyelet hitch type 50 mm
- Eco panel with digital timer and darkness sensor